



## **Time - Temperature Combination of Ohmic Heating System for Parboiling of Paddy**

**Aaradhana Patel<sup>1\*</sup>, Mohan Singh<sup>1</sup>, A. K. Rai<sup>2</sup>, M. A. Khan<sup>3</sup> and S. K. Garg<sup>4</sup>**

<sup>1</sup>Department of Post Harvest Process and Food Engineering, Jawaharlal Nehru Krishi Vishwa Vidyalaya, Jabalpur, Madhya Pradesh, 482004, India.

<sup>2</sup>Instrument Development and Service Centre, Jawaharlal Nehru Krishi Vishwa Vidyalaya, Jabalpur, Madhya Pradesh, 482004, India.

<sup>3</sup>Department of Food Science and Technology, Jawaharlal Nehru Krishi Vishwa Vidyalaya, Jabalpur, Madhya Pradesh, 482004, India.

<sup>4</sup>Faculty of Agriculture, Jawaharlal Nehru Krishi Vishwa Vidyalaya, Jabalpur, Madhya Pradesh, 482004, India.

### **Authors' contributions**

*This work was carried out in collaboration among all authors. Authors AP and MS designed the study, performed the statistical analysis, wrote the protocol and first draft of the manuscript. Authors MS, AKR, MAK and SKG managed the analyses of the study. Author MS managed the literature searches. All authors read and approved the final manuscript.*

### **Article Information**

DOI: 10.9734/CJAST/2019/v33i630109

#### Editor(s):

(1) Dr. Ogunlade, Clement Adesoji, Lecturer, Department of Agricultural Engineering, Faculty of Engineering, Adeleke University, Nigeria.

#### Reviewers:

(1) Deepika Kohli, Uttaranchal University, India.

(2) Kiran Devade, Pune University, India.

Complete Peer review History: <http://www.sdiarticle3.com/review-history/48130>

**Original Research Article**

**Received 28 December 2018**

**Accepted 18 March 2019**

**Published 25 March 2019**

### **ABSTRACT**

The technique for parboiling of paddy through ohmic heating was one of the best and fastest technique, which takes minimum time for complete a process due to high voltage of electric current. The aim of this study was to define the time & temperature combination of ohmic heating system for parboiling of paddy. The parboiling of paddy was a hydrothermal treatment, given prior to milling process of paddy and the methodology, applied for parboiling of paddy through ohmic heating setup was carried out in three steps, i.e. soaking, steaming and drying of parboiled paddy. The result was found after study, the temperature and time profiles of parboiled paddy through ohmic heating at different voltage gradients i.e., 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm up to temperature of

\*Corresponding author: E-mail: aradhana1910@gmail.com;

96°C for paddy and water mixture of 1:3, (500g paddy and 1500ml of water). The best result was found on 17.4 V/cm (voltage gradient) at 96°C temperature for 136 min and after milling of parboiled paddy the recovery of head rice yield was found 85.63 percent. So it was the most advantageous aspect for parboiling of paddy through ohmic heating for increase the head rice yield and reduce the breakage percentage of rice kernel.

*Keywords: Parboiling of paddy; time; temperature; voltage gradient; regression curve.*

## 1. INTRODUCTION

Ohmic heating is one of the excellent alternative method of heating, this technique shows much promise especially in food industry over the last few decades, because there is an increasing shift from batch thermal operation towards continuous high temperature and short time processing of foods [1].

### 1.1 Principle of Ohmic Heating

An ohmic heater is an electrical heating device that uses a liquid's own electrical resistance to generate the heat. Ohmic heating works on the principle of Ohm's law of electricity [2]. The passage of electric current through an electricity conductive food material obeys Ohm's law and heat is generated due to electrical resistance of food.

$$\begin{aligned} V &\propto I \\ V &= IR \end{aligned} \quad (1)$$


Where,

V = Voltage (volt),  
I = Current (ampere),  
R = Resistance (Ohm)

The term parboiling means partial cooking of rice within the husk. Parboiling is a hydrothermal

treatment. Parboiling of paddy is carried out in 3 steps, i.e. soaking, steaming, and drying [3]. In the soaking process void spaces in the rice kernel are filled with water. Starch granules absorb water and swell causing an increase in the volume of paddy [3, 4]. During steaming, soaked paddy is exposed to heat for a given duration so that the starch present in the rice kernel gets gelatinized. During the gelatinization process starch swells and fills the voids. Starch gelatinization during parboiling process is limited by the reaction of starch below 85°C and by diffusion of water above 85°C. In heating, the energy weakens the granule structure and more surfaces become available for water absorption [2,4].

In the traditional parboiling plant steaming process of soaked paddy is carried out in parboiling tank by direct injection of steam generated in the steam boiler which is fitted outside the rice mill in utility section [4]. Boiler unit consists of boiler, fuel tank, water tank, economizer, air preheater, mounting accessory, water supply, insulated piping from boiler up to parboiling tank [5]. The entire boiler unit needs separate care and for this purpose a certified boiler operator with helper needs to be maintained and paid throughout the year, which adds to the processing cost of parboiling rice [6]. If this heating system may be replaced with ohmic heating system, then it will be possible to

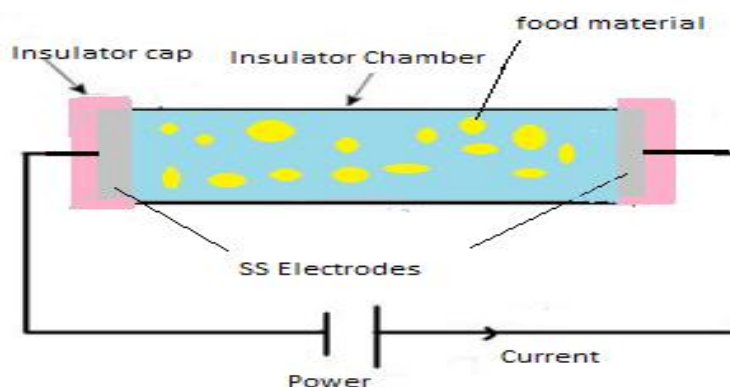

**Plate 1. Principle of ohmic heating**

simply attach two electrodes on the two opposite faces of parboiling tank which will help in resistance/ohmic heating of entire mass of paddy soaked in water housed inside the parboiling tank [7]. Therefore, in this study an experimental set-up of ohmic heating was developed for parboiling of paddy.

### 1.2 Advantages of Ohmic Heating

In this technology there is no need of boiler for parboiling of paddy, this is rapid and uniform heat treatment method for solid and liquid food products, there is less heat damage of the products, less nutrient loss and less colour change of the products through this method [1,3].

### 1.3 Disadvantages of Ohmic Heating

Ohmic heating system is difficult to monitor and to control, lack of generalized information, complex coupling between the temperature and the electrical field distribution. Electrochemical reactions and electrode corrosion increase because of low frequencies [1,3,6].

## 2. METHODOLOGY

This chapter deals with the description of theoretical consideration, engineering principle, materials used, experimental plan and description of device and instruments, to achieve the objective of the present investigation (Fig. 1). The present research work was undertaken in the Department of Post-Harvest process & Food Engineering, College of Agricultural Engineering, JNKVV, Jabalpur.

In the present study an experimental set-up of ohmic heating was developed for parboiling of paddy in Department of Post Harvest Process and Food Engineering, College of Agricultural Engineering, JNKVV, Jabalpur. In the experimental set-up (T-type) PVC pipe of 29 cm length from end cap to end cap, 19 cm height of 'T' of the PVC pipe, 10.75 cm diameter and 2.5 mm thickness has been selected for construction of the ohmic heating chamber [8]. Stainless steel (SS), rod with 1.2cm diameter and 10cm length was selected as electrode material because of its accuracy and suitability are good for food products. The distance between two electrodes has been kept as 14cm to pass maximum voltage gradient of 17.4 V/cm from Indian domestic supply of 240V. To avoid unforeseen accidents, three insulator caps, made of PVC

plastic were provided at three ends of T-shape container. One cap in vertical end of container is removable, when material was fed or removed from the container. Other two-insulator caps were fixed in both horizontal ends with electrodes. The copper coated (PT-100) temperature sensor was used to sense the temperature of 0-200°C is placed at the centre of the heating chamber to control the temperature during ohmic heating [9]. The multi-function meter was used in ohmic heating system for monitoring the input voltage, ampere and frequency (Hz.) of the current and it is directly connected to the main source of the current and display all readings time to time during the processing of material. The wooden platform of ohmic heating system having 61cm width and 61cm length for supporting the whole ohmic heating system or also for supporting of metal stand having 26cm height including with 10cm clamp for holding the heating chamber of ohmic heating system [8,9,10].

The experimental set-up of ohmic heating (Plates 2. A and b) was fabricated, for parboiling of paddy.

### 2.1 Selection of Variables

Input voltage gradients 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm and at the temperature of 96°C were taken as independent variables, where-as milling quality of parboiled paddy and process time during parboiling of paddy were considered as dependent variables [11].

### 2.2 Preparation of Raw Material

Selection of the 10 kg paddy as a sample of MTU1010, one of the most important variety which is grown in central part of India (Madhya Pradesh), was used in the study. Freshly harvested paddy grains were obtained from Directorate of Farms, JNKVV, Jabalpur, Madhya Pradesh, India. 10 samples of 500g paddy were used in the setup for parboiling of paddy [12].

### 2.3 Process of Parboiling

During the parboiling process, 10 samples were selected for the process and each sample was fed into ohmic heating chamber, where a ratio of 1:3 was maintained for paddy and water. Now the power was supplied to ohmic heating system, observations were recorded at voltage gradients of 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm in the ohmic heating chamber at the time interval of

0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 170 and 180 min in the T type PVC ohmic heating chamber (Plate no. 3). Time required in attaining the temperature of 96°C for parboiling of paddy was noted and then power supply was switch off and the sample was left in the ohmic heating chamber for 10 min [13].

Paddy was taken, and the remaining water was drained out and two observations were recorded at each voltage gradient, after parboiling of paddy by ohmic heating, first sample was sun dried for 1 hour and then shade drying was performed and the second sample was sun dried for five hours and then kept for shade drying [14].

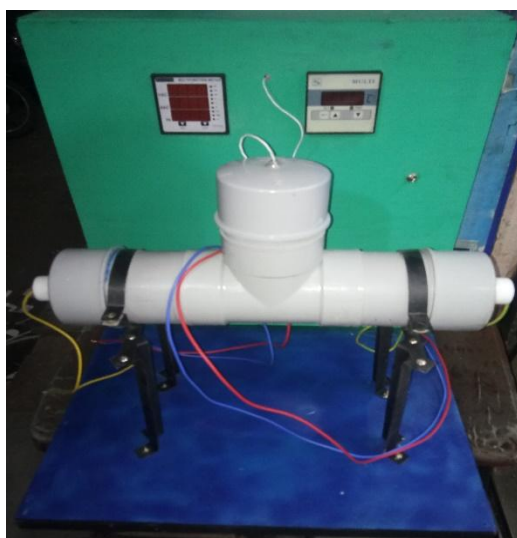


Plate 2. a Experimental set-up



Plate 2. b Temperature sensor with cap

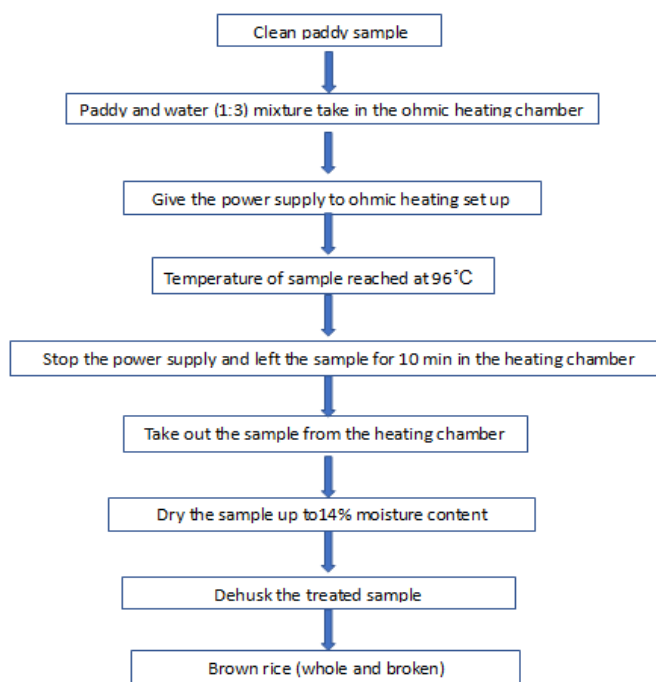


Fig. 1. Process flow for paddy processing; parboiling, drying and milling

Samples were dried at 14% mc (wb) before taking it to milling. Milling was done for the treated paddy at the final stage of the process.

Now the output of milled paddy as received from different openings (Husk, Broken and head rice)

were collected and analysed as well as compared with result of milling raw rice under similar milling conditions and the results were compared and tested to evaluate the effects and benefits of ohmic heating system [15,16].



**Plate 3. Parboiled paddy with water mixture**



**Plate 4. Dried ohmic heated parboiled paddy sample**



**Plate 5. Brown head rice of ohmic heated parboiled paddy**



### 3. RESULTS AND DISCUSSION

Ohmic heating technology is the most important technology for the research purpose, professionalism and widely used for food processing industries because of its advantages over conventional heating technology. Researchers and food processing industries found superior quality product with minimal nutritional or quality degradation after using the ohmic heating technology. Its allow uniform and fast heating, simple process and designing of ohmic heater is also relatively a simple task.

#### 3.1 Parboiling of Paddy by Ohmic Heating

The temperature and time profiles of parboiling of paddy with respect to voltage were studied by recording the temperature and time at voltage gradients of 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm up to temperature of 96°C for paddy and water mixture of 1:3, (500g paddy and 1.5 litre water) during the ohmic heating process was used for one experiment in the PVC ohmic heating cylinder chamber and are graphically represented in Fig. 2 to Fig. 6, respectively. All the graphs shown in the figures could be expressed in the form of linear regression equation:

$$Y = a + bx \tag{2}$$

Where,

Y = Temperature generated during ohmic heating for parboiling of paddy, °C  
 x = Time, min.

b = Slope (Rate of heating, dy/dx), °C/min  
 a = Regression coefficient

#### 3.2 Relationship between Time and Temperature at Voltage Gradient of 15.71V/cm

The Figs. 2, 3, 4, 5 and 6 shows the relationship between time taken to reach the temperature of 96°C for parboiling of paddy and at voltage gradient of 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm. Figs. 2, 3, 4, 5 and 6 clearly depict that the temperature increased with increase in time. In this experiment time required in attaining the temperature of 96°C for parboiling of paddy was 176, 166, 156, 146 and 136 mins respectively and then power supply was switch off and the sample was left in the ohmic heating chamber for 10 min. Now two observations were recorded after parboiling of paddy by ohmic heating, first sample was sun dried for 1 hour and then shade drying was performed and the second sample was sun dried for five hours and then kept for shade drying. For this experiment linear regression equation exhibiting the time-temperature relationship was

$$Y = 0.3636x + 31.432 \tag{3}$$

$$y = 0.4211x + 25.488 \tag{4}$$

$$Y = 0.454x + 23.96 \tag{5}$$

$$Y = 0.5018x + 21.324 \tag{6}$$

$$Y = 0.5493x + 21.152 \tag{7}$$

Regression curve between time and temperature at 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm was depicted in Fig. 6.

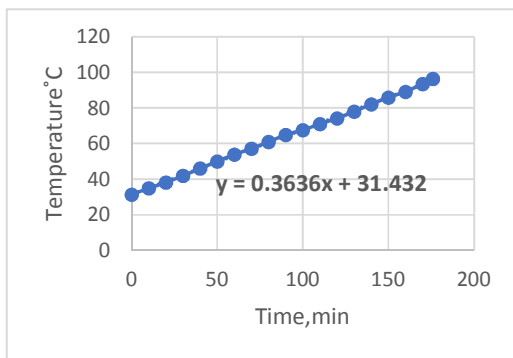


Fig. 2. Temperature of 96°C at voltage gradient of 15.71 V/cm for 176 min



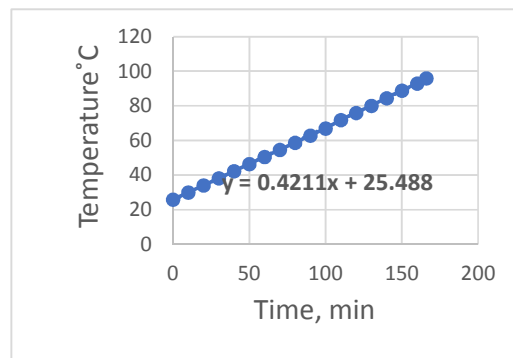



Fig. 3. Temperature of 96°C at voltage gradient of 16.07 V/cm for 166 min

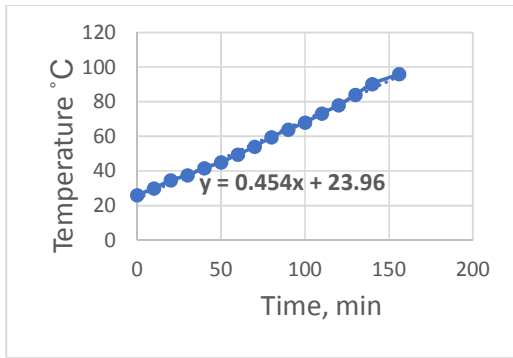

**Fig. 4. Temperature of 96°C at voltage gradient of 16.43 V/cm for 156 min**

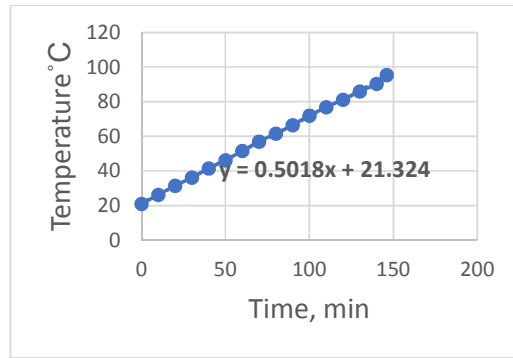

**Fig. 5. Temperature of 96°C at voltage gradient of 16.79 V/cm for 146 min**

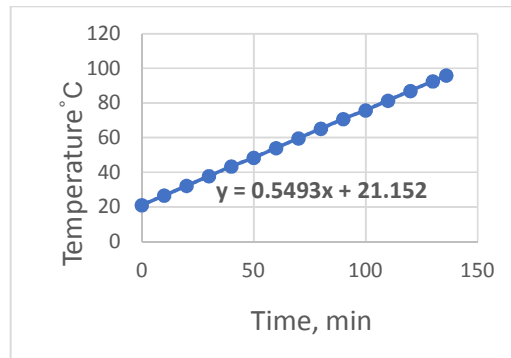


**Fig. 6. Temperature of 96°C at voltage gradient of 17.14 V/cm for 136 min**

Source: Aaradhana Patel. 2018. Investigation on Application of Ohmic Heating for Parboiling of Paddy. Unpublished thesis, COAE, JNKVV, Jabalpur

### 3.3 Time taken in Parboiling to Reach the Temperature of 96°C at Different Voltages of 220, 225, 230, 235 and 240V


parboiling time of samples was reduced 176 min to 136 min with respect to voltage. It is quite obvious from the Fig. 7 that the parboiling rate increased considerably as the voltage was increased.

Temperature profiles indicate that with the increase in voltage from 220 V to 240 V, the

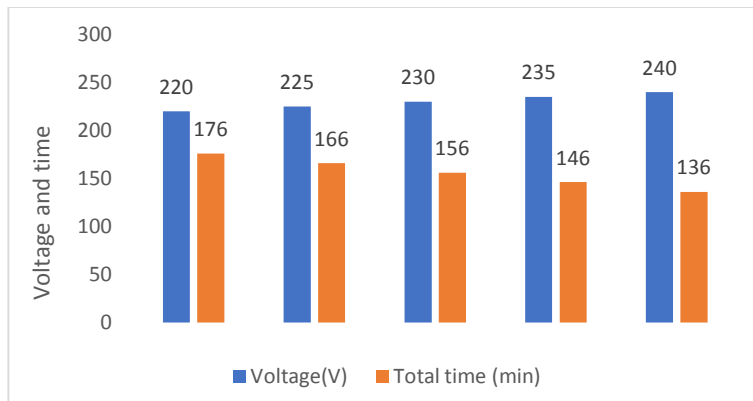

**Fig. 7. Relationship between total time at 220, 225, 230, 235 and 240V**

Source, Aaradhana Patel. 2018. Investigation on Application of Ohmic Heating for Parboiling of Paddy. Unpublished thesis, COAE, JNKVV, Jabalpur

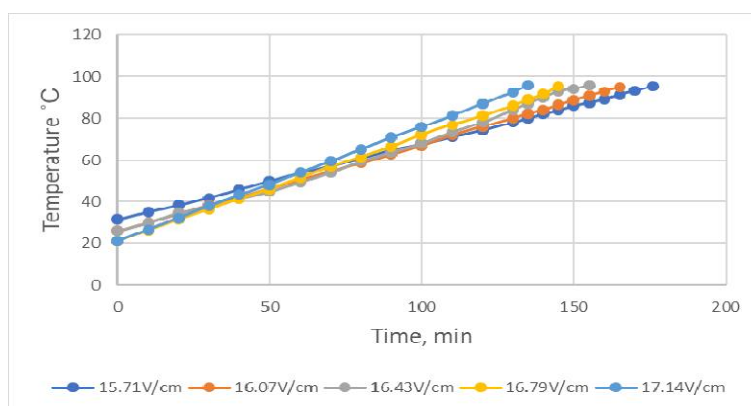

**Fig. 8. Relationship between time and temperature at 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm**  
 Source: Aaradhana Patel. 2018. Investigation on Application of Ohmic Heating for Parboiling of Paddy.  
 Unpublished thesis, COAE, JNKVV, Jabalpur

### 3.4 Time taken in Parboiling to Reach the Temperature of 96°C at Voltage Gradients of 15.71, 16.07, 16.43, 16.79 and 17.14 V/cm

Fig. 8 shows that the heating rate increased considerably as the voltage was increased. Time and temperature profiles indicated that with the increase in voltage gradient, temperature was increased, and the parboiling time of samples was reduced meaning thereby that the slope of curve for higher voltage was steeper than the slope of curve for lower voltage. At higher voltage, the current passing through the sample also increased, and this induced the faster heat generation.

## 4. CONCLUSION

Temperature profiles indicated that with the increase in voltage gradient from 15.71 V/cm to 17.14 V/cm, the parboiling time of samples (paddy) was reduced from 176 min to 136 min with respect to voltage. Heating rate increased considerably as the voltage was increased. Time and temperature profiles indicated that with the increase in voltage gradient, temperature was increased, and the parboiling time of samples were reduced meaning thereby that the slope of curve for higher voltage was steeper than the slope of curve for lower voltage. Soaking and steaming both process was completed in the ohmic heating chamber for parboiling of paddy. From the linear regression equations, the evident that slope of curve was increased (0.3636-0.5493) with increasing the voltage gradient 15.71 V/cm to 17.14 V/cm.

## COMPETING INTERESTS

Authors have declared that no competing interests exist.

## REFERENCES

1. Dhingra Devinder, Chopra Sangeeta, Rai DR. Stabilization of raw rice bran using ohmic heating. *Agric Res.* 2012;1(4):392–398.
2. Kautkar Sheshrao Sakharam, Pandey Jai Prakash, Singh Anupama, Kumar Anil, Shukla Anil Kumar. Development of ohmic heating apparatus for extraction of rapeseed oil. *International Journal for Innovative Research in Science & Technology.* 2016;2(11):211-215.
3. Amitabh Anupam, Kashyap Vinita, Kumar Manish, Kumari Anuradha, Kumar Vishal. Effect of ohmic heating on processing of soymilk in comparison to conventional process. *International Journal of Current Microbiology and Applied Sciences.* 2017;6(12):2918-2926.
4. Lbukun EO. Effect of prolonged parboiling duration on proximate composition of rice. *Scientific Research and Essay.* 2008;3(7): 323-325.
5. Ayamdoo JA, Demuyakor B, Dogbe W, Owusu R. Parboiling of paddy rice, The Science and perceptions of it as practiced in northern Ghana. *International Journal of Scientific & Technology Research.* 2013; 2(4):13-18.
6. Anonymous. Available: <https://www.scribd.com/doc/2>



- 75701042/Projectprofile-Raw-Boiledrice. 2015.
7. Ekpodile Blandine A, Honfoga Barthelemy G. Effects of industrial paddy processing on local rice competitiveness in Glazoue District, Benin Republic. *British Journal of Economics, Management & Trade*. 2015;10(1):1-13.
  8. Mohanty SN, Bal S, Das SK, Panda MKJ. Effects of hydrostatic parboiling on milling quality of rice. *J. Agril. Engng*. 2002;39(2): 9-14.
  9. Kautkar Sheshrao, Pandey Ram Krishna, Richa Rishi, Kothakota Anjineyulu. Temperature dependent electrical conductivities of ginger paste during ohmic heating. *International Journal of Agriculture, Environment and Biotechnology*. 2015;8(1):21-27.
  10. Kumar JP, Ramanathan M, Ranganathan TV. Ohmic heating technology in food processing – A review. *International Journal of Engineering Research and Technology*. 2014;3:1236-1241.
  11. Miah MAK, Haque A, Douglass MP, Clarke B. Parboiling of rice. Part I: Effect of hot soaking time on quality of milled rice. *International J. Food Sci. Technol*. 2002; 37:527-537.
  12. Sowbhagya CM, Ali SZ. Effects of presoaking on cooking time and texture of raw and parboiled rice. *J. Food Sci. Technol*. 1990;28(2):76-80.
  13. Akhter Muhammad, Ali muhammad azhar, Haider zulqarnain, Muzammil Shahzad. Efficacy of parboiling on physico-chemical properties of some promising lines/varieties of rice (*Oryza sativa* L.). *Sci. Tech. and Dev*. 2014;33(3):115-122.
  14. Khalaf, Sastry. Effect of fluid viscosity on the ohmic heating rate of solid-liquid mixtures. *J Food Eng*. 1996;27:145-58.
  15. Nagarajan N, Madesh A, Jaisabari K, Jaya Prakash N. fabrication of paddy drier processor global research and development. *Journal for Engineering*. 2016;1(3):2455-5703.
  16. Aaradhana Patel. Investigation on application of ohmic heating for parboiling of paddy. Unpublished Thesis, COAE, JNKVV, Jabalpur (M.P.); 2018.

© 2019 Patel et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*  
<http://www.sdiarticle3.com/review-history/48130>